



[www.deltamembranes.com](http://www.deltamembranes.com)

Delta Membrane Systems Ltd

External  
Ancillary Products



## AQUADUCT

Delta Aquaduct is a geocomposite covered drainage pipe suitable for external drainage. Delta Aquaduct can be installed externally, directing ground water into a sump or soaking away and reducing floatation pressures from being on the slab. Delta Aquaduct is a long-lasting and maintenance-free service in even the harshest environments. This tough and durable perimeter channel has exceptional resistance to abrasion and cutting for use on a wide variety of ground conditions. Delta Aquaduct has no corrosion or scaling and is resistant to heat, fuels, chemicals, UV, ozone, weathering, hydrolysis and microbiological attack. Delta Aquaduct is produced with an outer geotextile filter to prevent particles from entering the channel.


DMS078-1	Aquaduct 60 (60mm x 150m)	DMS145	Aquaduct 60 End Caps (red/Blue bung)
DMS085	Aquaduct 100 (100mm x 50m)	DMS095	Aquaduct 100mm T-Piece Connectors
DMS087	Aquaduct 60mm Straight Connectors	DMS096	Aquaduct 100mm Straight Connectors
DMS089	Aquaduct 60mm T-Piece Connector	DMS098	Aquaduct 100mm Y-Piece Connector
DMS102	Aquaduct 60mm Y-Piece Connectors		



## TERRAXX SCHRAUBE

Safe attachment of Delta Terraxx to perimeter insulation panels. Ideal for mounting the Terraxx protection and drainage system on perimeter insulation panels made of XPS with a thickness of 60 mm and above. Consumption 1 piece / m<sup>2</sup>.

DMS 038

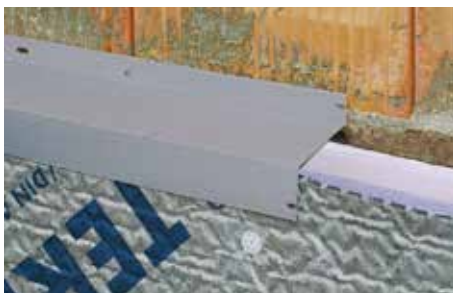

## TERRAXX PROFILE

Very well suited for use in combination with DELTA drain membranes. Suitable for insulating materials from 60 to 110mm thick. Available in 2m strips.

DMS 137



### GEO-DRAIN CLIPS

Geo-Drain clips are used to securely fix external drainage and protection membranes such as Geo-Drain Quattro, Terraxx or NP Drain.

**DMS 093**    **Box of 100**



### DELTA WASHERS

Delta Washers are used for securely fixing external drainage and protection membranes.

**DMS 024**    **Box of 100**



### STOP PINS

Delta Stop Pins are self adhesive pins used in external waterproofing applications where external drainage and protection membranes are used.

**DMS 029**    **Box of 100**



### DELTA PLUGS

Provides a fixing point for Delta MS 500 membrane. Delta fixing plugs have a centrally located internal shank which accommodates a 5,5mm dia./size 12 screw at a maximum depth of 30mm.

**DMS 014**    **Box of 100**



### QWIK-SEAL PLUGS

A watertight self-sealing fixing plug suitable for our MS 500 PT membranes. These plugs have a centrally located internal shank that can accommodate a 5mm dia./size 10 screw at a maximum depth of 30mm.

**DMS 131**    **Box of 100**



### MS PROFILE STRIPS

Delta MS Profile Strip is used in external waterproofing applications as a capping strip where an external drainage and protection membrane is installed.

**DMS 017**    **2m length**



## ROPE

A dependable sealing for Delta fixing Plugs which do not have grommets. Delta Rope is ideal for sealing joints in MS20 and in stud to stud joints.

**DMS 011**    4.75m x 10mm



## DOUBLE SIDE TAPE

This strong and durable double sided butyl tape is ideal for sealing membranes together at overlaps/adjacent seals.

**DMS 012**    22.5m x 28mm



## CORNER STRIP

A waterproof, firm, and lasting single-sided sealing tape, typically used for sealing and connecting membranes on joints/wall floor junction or overlap.

**DMS 020**    150mm x 20m



## FIRE RETARDANT FLEECE TAPE

A high-performance fire retardant fleece backed butyl waterproof sealing tape for butt joints and overlapping of membranes.

**DMS 852**    1mm x 220mm x 20m



## FLEECE TAPE

Designed for use with our Delta PT membrane. Suitable for joint sealing, detailing around service penetrations where Delta PT membranes have been installed.

**DMS 238**    100mm x 20m



## DELTA THAN

Delta Than is a superior waterproof mastic which is suitable for sealing joints and detailing.

**DMS 019**    310ml



Delta House, Merlin Way,  
North Weald, Epping,  
Essex CM16 6HR  
Tel: +44 (0)1992 523 523  
info@deltamembranes.com  
www.deltamembranes.com