

# ***TOPCRETE***

*COURSING BRICKS*

Robust, durable, dense aggregate blocks



# TOPCRETE

## COURSING BRICKS

**TOPCRETE is a range of dense aggregate blocks available in a variety of formats and suited to a number of high loadbearing applications. TOPCRETE COURSING BRICKS are designed for use with the range of TOPCRETE blocks.**

### LESS WASTAGE

Ideal for infilling over lintels and between floor joists.

### CONSISTENT BACKGROUND

Provides a uniform background to receive plaster or render.

### SOUND INSULATION

The density of Topcrete Coursing Bricks matches that of Topcrete blocks ensuring the sound insulation integrity of the wall.


### FIRE

All Topcrete products conform to a fire rating of Class A1 to BS EN 13501.

## PRODUCT PROPERTIES

PRODUCT	COMPRESSIVE STRENGTH N/mm <sup>2</sup> *	BLOCK THICKNESS mm	FACE SIZES, mm LENGTH X HEIGHT	THERMAL CONDUCTIVITY $\lambda$ (W/mK)	DRY DENSITY kg/m <sup>3</sup>	UNIT WEIGHT kg**	NUMBER OF UNITS PER m <sup>2</sup> OF WALL
COURSING BRICK	7.3, 10.4, 17.5, 22.5	100	215 x 65	1.07	1950	2.8	60 (sold in packs of 416)
	7.3 <sup>(1)</sup> , 10.4 <sup>(1)</sup> , 22.5 <sup>(1)</sup>	140	215 x 65	1.07	1950	3.9	60 (sold in packs of 312)

\*Manufactured to Category 2 manufacturing control. \*\*Unit weights are given for design purposes, are approximate and calculated based on the specified dry density with a moisture content of 3% by weight added to provide equilibrium weights. (1) Check with Tarmac blocks sales team for availability.

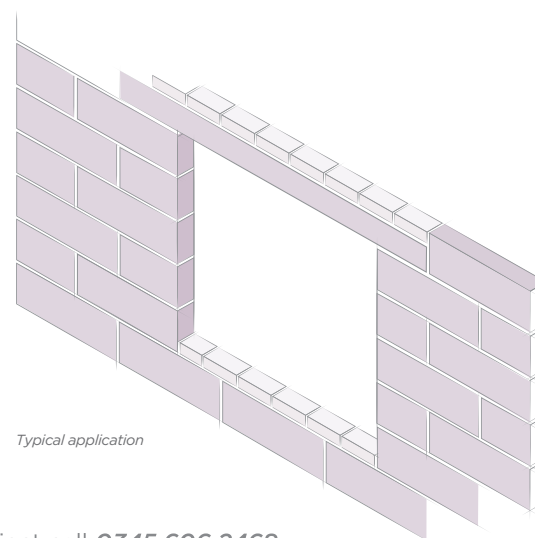

Typical application

To find out more about our range of BLOCKS and the best solution for your project call **0345 606 2468**  
Check out our U-value Calculator [www.tarmac.com/u-value-calculator](http://www.tarmac.com/u-value-calculator)

**TARMAC.COM**